



# EUROMULTI MIDI

## Multi-Function Cash Unit with Time Delay Lock



- ✓ The Most Effective Security Solution
- ✓ Ideal For Banks, Post Offices, Gas Stations...
- ✓ Suitable For Banknotes, Coins, Checks, Cards, Documents...
- ✓ Time Delay For Each Drawer
- ✓ Unique Modular System
- ✓ Silent Alarm With Smart Blocking System
- ✓ PC Connection
- ✓ ISO 9001

EuroMulti Midi security units are designed for providing an increased cash security during working hours. They provide tested physical and psychological protection. Affordable price enables using them for each cashier. It provides different philosophy of security than expensive and heavy safes. EuroMulti units consist of two main parts – steel box and drawer modules. The front panels of drawers are reinforced with 6 mm thick steel sheets. There are two different models of EuroMulti Midi according to different types of drawer modules. Operating of EuroMulti Midi is compatible with EuroMulti and EuroMulti Mini.

### Versions

There is a possibility to order EuroMulti Midi Simple. Mechanical part of units has just the same operating a EuroMulti Simple – by buttons.


### EuroMulti Midi units are mainly used as:

- ✓ Universal for cash deposit/dispense
- ✓ Cash exchange

### What do EuroMulti Midi units offer to you?


- ✓ Increasing security for your cashiers and valuables
- ✓ The most effective protection during working hours
- ✓ The best solutions for “open” banks

### Drawer combinations

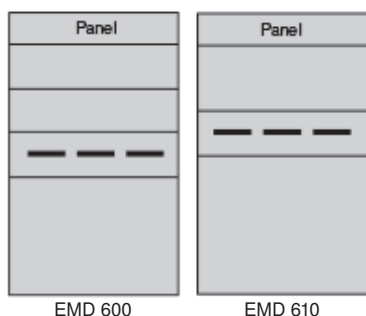

### Features

- ✓ Tested construction and grade A lock
- ✓ PIN access for 9 cashiers and 1 supervisor
- ✓ Time delay for each drawer from 1-999 sec. or 1-99 min.
- ✓ Access for one/more cashier/s at the same time
- ✓ Protection between cashier-cashier and cashier-supervisor
- ✓ Silent alarm activation and blocking system
- ✓ Special automatic setting during robbery
- ✓ More than 25 special additional security settings
- ✓ Event history for 1000 events
- ✓ Alarm output NO/NC
- ✓ Internal UPC for min 100 openings
- ✓ R2 232 connection to PC
- ✓ ISO 9001 quality management



### Technical data

|                        |   |
|------------------------|---|
| Time delay settings    | 1-999 sec. or 1-99 min. for each drawer |
| External blocking      | yes                                     |
| Serial ports           | RS 232, USB and I2C                     |
| Number of drawers      | 2, or 3                                 |
| Standard color         | gray RAL 7035                           |
| Power supply           | 110 - 230/15V, 2A, CE                   |
| Reserve power supply   | ACCU 12V/1,2 Ah                         |
| Dimensions (H x W x D) | 600 x 400 x 530 mm                      |
| Weight                 | 75 kg                                   |