



EUROMULTI MINI 300


Multi-Function Cash Unit with Time Delay Lock



- ✓ The Most Effective Security Solution
- ✓ Ideal For Banks, Post Offices, Gas Stations...
- ✓ Suitable For Banknotes, Coins, Checks, Cards, Documents...
- ✓ Time Delay For Each Drawer
- ✓ Unique Modular System
- ✓ Silent Alarm With Smart Blocking System
- ✓ PC Connection
- ✓ ISO 9001

EuroMulti Mini 300 security units are designed to provide increased cash security during working hours. They provide tested physical and psychological protection. Affordable price enables using them for each cashier. It provides different philosophy of security than expensive and heavy safes. EuroMulti Mini units consist of two main parts – steel box and drawer modules. The front panels of drawers are reinforced with 6 mm thick steel sheets. There are four different models of EuroMulti Mini 300 according to different types of drawer modules. Operating of EuroMulti Mini is compatible with EuroMulti and EuroMulti Midi.

Drawer combinations

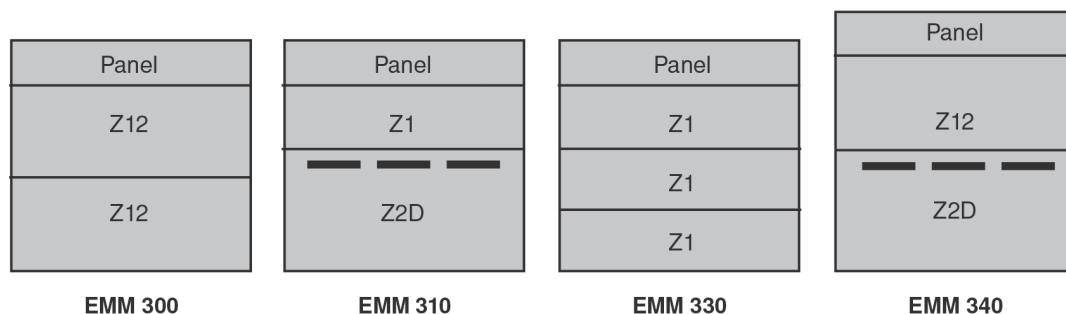

Versions

There is a possibility to order EuroMulti Mini Simple. Mechanical part of units is just the same operating as EuroMulti Simple – by buttons.

EuroMulti Mini units are mainly used as:


- ✓ Universal for cash deposit/dispense
- ✓ Cash exchange

What do EuroMulti Mini units offer to you?

- ✓ Increasing security for your cashiers and valuables
- ✓ The most effective protection during working hours
- ✓ The best solutions for “open” banks

Features

- ✓ Tested construction and grade A lock
- ✓ PIN access for 9 cashiers and 1 supervisor
- ✓ Time delay for each drawer from 1-999 sec. or 1-99 min.
- ✓ Access for one/more cashier/s at the same time
- ✓ Protection between cashier-cashier and cashier-supervisor
- ✓ Silent alarm activation and blocking system
- ✓ Special automatic setting during robbery
- ✓ More than 25 special additional security settings
- ✓ Event history for 1000 events
- ✓ Alarm output NO/NC
- ✓ Internal UPC for min 100 openings
- ✓ R2 232 connection to PC



Technical data

Time delay settings	1-999 sec. or 1-99 min. for each drawer
External blocking	yes
Serial ports	RS 232, USB and I2C
Number of drawers	2, or 3
Standard color	gray RAL 7035
Power supply	110 - 230/15V, 2A, CE
Reserve power supply	ACCU 12V/1,2 Ah
Dimensions (H x W x D)	405 x 434 x 442 mm
Dimensions EMM 340 (H x W x D)	451 x 434 x 442 mm
Weight	50 kg